

SuperSnake GT02S/GT02SW

The ultimate distance and access solution

If distance and access are your problem, then take a look at SuperSnake GT02S and GT02SW.

SuperSnake extends the reach of standard Euro MIG welding guns, providing simple distance wire feeding for a variety of filler wires up to 30m from the wire feed unit.


Negotiating its terrain with ease, SuperSnake is the ultimate predator of the welding world.

In brief

- Suitable for Fe/SS/Al/FCW/MCW filler wires
- Includes voltage and wire speed adjustment
- Large, clear meter display
- Brights LED cabinet lighting
- 10, 15, 20, 25m air- and water-cooled models
- Visible safety with tough, bright orange sheathing



FastMig KMS/Pulse power source.

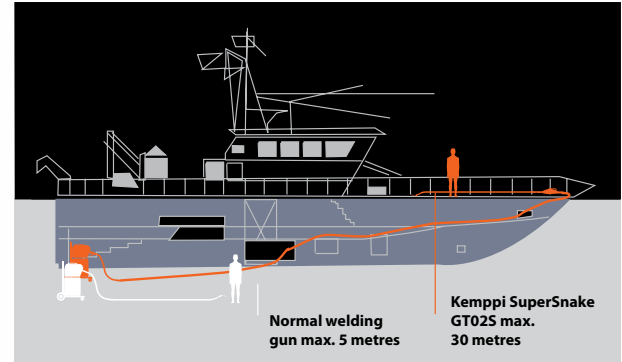

	SuperSnake
Output @ 60% duty cycle (40 °C)	380A
Wire feed mechanism	2-roll
Wire feed speed	0–25m/min
Feeder body (GT02SW) dimensions LxWxH (mm)	102 x 371 x 138
Wire recommendations, 25m	Solid Fe/SS \varnothing 1.0–1.6
	Al alloys \varnothing 1.2–1.6
	FCW/MCW \varnothing 1.2–1.6



reddot design award
honourable mention 2009



FastMig MXF 67 wire feed unit.

ProMig interconnection
cable set.

SuperSnake key features

The SuperSnake GT02S/GT02SW removes the need to carry large and heavy wire feed units, reducing personnel fatigue, improving safety, and increasing productivity. The SuperSnake connects easily to FastMig MXF wire feed units, bringing quality welding to locations that other welding brands just can't reach.

SuperSnake GT02S/GT02SW is compatible with MMT and PMT welding guns. See pages 17–18.

